




**RC4784**

## **02| Assembly**

### | Screwdrivers

- Straight screwdrivers
- Pistol screwdrivers

# SCREWDRIVER

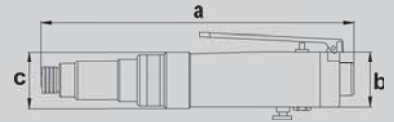

**Model** Part#  
**RC4784** 8951073023

**Model** Part#  
**RC4760** 8951073012

**Model** Part#  
**RC4700** 8951073002

Model	RC4784	
Min Torque		1 Nm
Max Torque		6 Nm
Bit Drive		1/4" Fem.Hex QC
Adjustment		External
Speed		1770 rpm
Weight		0,92 kg
Hose		8 mm
Dimensions axbxc		165x160x45 mm
Air cons. ave.		440 l/min
Air cons.		595 l/min
Air inlet		1/4" IG
Clutch Type		Roller*
Sound LpA		80.3 dB(A)
Vibration		< 2,5 m/s <sup>2</sup>


**6 Nm external adjustment**

Model	RC4760	
Min Torque		1 Nm
Max Torque		7 Nm
Bit Drive		1/4" Fem.Hex QC
Adjustment		Internal
Speed		2000 rpm
Weight		1,10 kg
Hose		8 mm
Dimensions axbxc		242x42 mm
Air cons. ave.		350 l/min
Air cons.		470 l/min
Air inlet		1/4" IG
Clutch Type		Roller
Sound LpA		88.7 dB(A)
Vibration		< 2,5 m/s <sup>2</sup>

**7 Nm inner adjustment**

Model	RC4700	
Min Torque		1 Nm
Max Torque		7 Nm
Bit Drive		1/4" Fem.Hex QC
Adjustment		Internal
Speed		2100 rpm
Weight		1,15 kg
Hose		8 mm
Dimensions axbxc		210x150x42 mm
Air cons. ave.		430 l/min
Air cons.		585 l/min
Air inlet		1/4" IG
Clutch Type		Roller
Sound LpA		88.6 dB(A)
Vibration		< 2,5 m/s <sup>2</sup>

**7 Nm inner adjustment**




- Lightweight thanks to composite material
- Ergonomic rubber handle
- Precise adjustable speed up to 1770 rpm
- Also for use with balancer
- The tool offers 3 possible connections to compressed air supply
- To use upper or side air inlet pls. use model AR1 or regulateable swivel joint DG1R for regulating incoming air
- Quick coupler for screw driver bits
- Forward / reverse switch

- Large straight tool, for fast assembly
- Easy to reach forward/reverse shift which can be locked in reverse for longer disassemblies
- Quick coupler for screw driver bits
- Forward / reverse switch

- Popular short screwdriver
- High speed
- Quick coupler for screw driver bits
- Forward / reverse switch

- \*R: shut-off by slip clutch  
- D: motorstart per push button and proof



# The right tool for your needs !

Simple setting of the  
shut-off torque from  
outside on front ring

Hanger for balancer



Composite housing  
with insulating  
rubber handle

Practical thumb  
switch for  
forward / reverse

Silenced / down  
handle exhaust

**RC4784**