



**RC7702V6**

## **08| Grinding & sanding**


### | Grinder

- Die & angle die grinders
- Erasers
- Tyre buffer
- Pistol & angle grinders
- MBX-removal system

### | Sanders

- Belt sanders
- Orbital sanders

# DIE GRINDER < 400 W

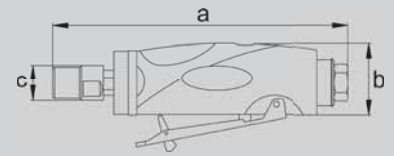

**Model**  
**RC7051**

**Part#**  
8951000165

Model	RC7051
Collet	3 mm
Power	40 W
Speed	60000 rpm
Weight	0.2 kg
Hose	8 mm
Dimensions axbxc	190x145x50 mm
Air cons.	96 l/min
Air cons.	192 l/min
Air inlet	1/4" IG
Sound LpA	71 dB(A)
Vibration	< 2,5 m/s <sup>2</sup>
<b>40 Watt - 60000 rpm</b>	



- 3 mm lightweight die grinder
- 60000 rpm with rear exhaust
- 1/8" collet included

**Model**  
**RC7009**

**Part#**  
8951000274

Model	RC7009
Collet	6 mm
Power	300 W
Speed	30000 rpm
Weight	0.37 kg
Hose	8 mm
Dimensions axbxc	190x145x50 mm
Air cons.	144 l/min
Air cons.	564 l/min
Air inlet	1/4" IG
Sound LpA	85.7 dB(A)
Vibration	3.33 m/s <sup>2</sup>
<b>300 Watt - 30000 rpm</b>	



- High speed motor (30 000 RPM)
- Metal housing with composite painting for great grip
- Rear exhaust
- Safety trigger

**Model**  
**RC7058**

**Part#**  
8951000278

Model	RC7058
Collet	6 mm
Power	700 W
Speed	23500 rpm
Weight	0.82 kg
Hose	8 mm
Dimensions axbxc	190x145x50 mm
Air cons.	288 l/min
Air cons.	1146 l/min
Air inlet	1/4" IG
Sound LpA	92.7 dB(A)
Vibration	1.82 m/s <sup>2</sup>
<b>700 Watt - 23500 rpm</b>	



- 700W power
- Composite housing with ergonomic trigger for perfect handling
- Rear exhaust
- Long spindle for easy access to workspace

## Engravers Tune up Kit

Model	Part#
RC7051	8950280060



# For bodyshop professionals




**Spindel lock**

**400W with low speed  
and low vibration**



**Compatible with large  
range of accessories**

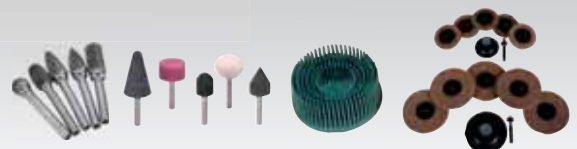












**RC7128**

# DIE GRINDER 300 W - 400 W

www.rodcraft.com

**Model**  
RC7028

**Part#**  
8951000275

Model		RC7028
Collet		6 mm
Power		400 W
Speed		27000 rpm
Weight		0.72 kg
Hose		8 mm
Dimensions axbxc		190x145x50 mm
Air cons.		228 l/min
Air cons.		900 l/min
Air inlet		1/4" IG
Sound LpA		85.2 dB(A)
Vibration		2.38 m/s <sup>2</sup>
<b>400 Watt - 27000 rpm</b>		














- Perfect for burrs and mounted points
- Straight universal 400W die grinder
- One hand spindle lock
- High torque motor
- "Beast" design rubber handle



**Model**  
RC7048

**Part#**  
8951000276












Model		RC7048
Collet		6 mm
Power		400 W
Speed		27000 rpm
Weight		0.8 kg
Hose		8 mm
Dimensions axbxc		190x145x50 mm
Air cons.		228 l/min
Air cons.		900 l/min
Air inlet		1/4" IG
Sound LpA		85.7 dB(A)
Vibration		3.78 m/s <sup>2</sup>
<b>400 Watt - 27000 rpm</b>		



- For tight workspace
- Extended 400W die grinder
- One hand spindle lock
- High torque motor
- "Beast" design rubber handle

**Model**  
RC7128

**Part#**  
8951000277

Model		RC7128
Collet		6 mm
Power		400 W
Speed		23000 rpm
Weight		0.76 kg
Hose		8 mm
Dimensions axbxc		190x145x50 mm
Air cons.		228 l/min
Air cons.		900 l/min
Air inlet		1/4" IG
Sound LpA		84.8 dB(A)
Vibration		4.05 m/s <sup>2</sup>
<b>400 Watt - 23000 rpm</b>		



- Ideal for backing pads and cleaning applications
- 400W angle die grinder
- One hand spindle lock
- High torque motor
- "Beast" design rubber handle



# Strong power and spindle lock

**400W**  
**27 000 RPM**  
Power regulation

Less fatigue and precise  
work with vibration below  
**2,5 m.s<sup>-2</sup>**



Fast and secure  
spindle lock system  
made of metal ring




Designed for safety  
and ergonomics

**RC7028**  
**RC7048**



# DIE GRINDER ERASER

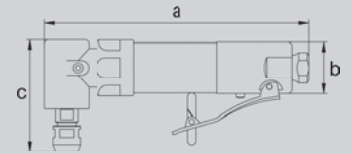

**Model** RC7068  
**Part#** 8951000329

**Model** RC7684  
**Part#** 8951000115

**Model** RC7038  
**Part#** 8951000328

Model	RC7068
Collet	6 mm
Power	400 W
Speed	2800 rpm
Weight	0.95 kg
Hose	8 mm
Dimensions axbxc	217x72x43 mm
Air cons.	228 l/min
Air cons.	900 l/min
Air inlet	1/4" IG
Sound LpA	96.1 dB(A)
Vibration	4.05 m/s <sup>2</sup>
<b>400 Watt - 2800 rpm</b>	

Model	RC7684
Collet	6 mm
Power	250 W
Speed	20000 rpm
Weight	0.52 kg
Hose	8 mm
Dimensions axbxc	120x125x42 mm
Air cons.	350 l/min
Air cons.	470 l/min
Air inlet	1/4" IG
Sound LpA	80.1 dB(A)
Vibration	4.02 m/s <sup>2</sup>
<b>250 Watt - 20000 rpm</b>	

Model	RC7038
Spindle Size	3/8"-24 male 5/16" female
Power	400 W
Speed	2800 rpm
Weight	0.92 kg
Hose	8 mm
Dimensions axbxc	210x72x43 mm
Air cons.	500 l/min
Air cons.	918 l/min
Air inlet	1/4" IG
Sound LpA	86 dB(A)
Vibration	4.5 m/s <sup>2</sup>
<b>Erasing of adhesives and vinyl</b>	



- Low speed die grinder providing huge working torque
- 2800 RPM with speed regulator
- "Beast" design rubber handle
- Rear exhaust
- Safety trigger



- Pistol grinder with good power transmission (no angle gear)
- With silencing exhaust hose system, for extra reduced noise and no disturbing exhausted air
- 3 mm collet as extra accessory available



- Efficient tool for renovation of painted surfaces with a slim eraser wheel
- No danger for the painted surface – please follow the instruction manual strictly (clean and dust-free, do not press)
- Low speed erasing due to the powerful planetary gear avoids heating up
- Good grip due to integrated rubber patches
- Lever sinks plainly into the housing

**Model** Part#  
**RC7684RE** 8951000118

Pistol grinder with exhaust hose DUS35

**Model** Part#  
**RC7686RE** 8951000119

Pistol Die Grinder Set with:

- 6 mm collets pistol die grinder model RC7684RE with silencing exhaust hose system model DUS35
- Backing pads 50 mm and 75 mm with Roll-On quick assembly system
- 5 abrasive felt 50 mm
- 5 abrasive felt 75 mm
- 3 "Bristle" disk (K50/K80/K120)
- 1 oil bottle
- 1 tool box
















# TYRE BUFFER & ACCESSORIES

www.rodcraft.com

Model	Part#	
RC7072RE	8951075270	19000 rpm
RC7077RE	8951075310	3400 rpm












Model	Part#	
RC7075RE	8951075290	

Model	RC7072RE	RC7077RE
Collet	 10 mm	10 mm
Power	 400 W	400 W
Speed	 19000 rpm	3400 rpm
Weight	 0.65 kg	0.8 kg
Hose	 8 mm	8 mm
Dim. axbxc	 232x43x35 mm	232x40x44 mm
Air cons.	 410 l/min	410 l/min
Air cons.	 520 l/min	520 l/min
Air inlet	 1/4" IG	1/4" IG
Sound LpA	 74.8 dB(A)	74 dB(A)
Vibration	 3.04 m/s <sup>2</sup>	5.32 m/s <sup>2</sup>

Tyre buffering with 10 mm quick chuck



- Easy to control handle form
- Slow running powerful planetary gear
- "RE" models are equipped with a silencing
- Exhaust hose system that takes away the
- Cold air - also avoids rubber dust being
- Distributed, no lubricants from the compressed
- Air can get onto the cleanly buffed surface, that
- Should be ready for vulcanisation
- Equipped with 10 mm quick chuck

Model	RC7075RE
Collet	 11 mm
Power	 400 W
Speed	 3400 rpm
Weight	 0.8 kg
Hose	 8 mm
Dimensions axbxc	 340x40x32 mm
Air cons.	 410 l/min
Air cons.	 520 l/min
Air inlet	 1/4" IG
Sound LpA	 74.1 dB(A)
Vibration	 5.58 m/s <sup>2</sup>

Tyre buffering with 11 mm hex. quick chuck




- Easy to control handle form
- Slow running powerful planetary gear
- "RE" models are equipped with a silencing
- Exhaust hose system that takes away the cold air - also avoids rubber dust being distributed, no lubricants from the compressed air can get onto the cleanly stuffed surface, that should be ready for vulcanisation
- Version 7078RE for high radial forces (with extra heavy duty front bearing)
- Equipped with quick change chucks with threaded adapter 3/8"-24

11 mm hexagonal chuck part# 8951011463  
Automatically centering chuck/adaptor for extremely high power without slipping. Accessories and grinding wheels e.g. for tyre buffing can be quickly exchanged. Including an adaptor for the use of drill chucks 3/8"-24.





# PISTOL & ANGLE GRINDER



**Model** RC7681K  
**Part#** 8951000019

**Model** RC7150  
**Part#** 8951072021

**Model** RC7120  
**Part#** 8951072001

Model		RC7681K
Drive		1/4" – 20UNC AG
Disc		50 - 75 mm
Power		150 W
Speed		15000 rpm
Weight		0.4 kg
Hose		8 mm
Dimensions axbxc		120x125x42 mm
Air cons.		365 l/min
Air cons.		490 l/min
Air inlet		1/4" BSP IG
Sound LpA		74.6 dB(A)
Vibration		5.9 m/s <sup>2</sup>

Model		RC7150
Drive		7/16"-20AG
Disc x hole		75x22 mm, 105x22 mm, 115x22 mm
Power		500 W
Speed		18000 rpm
Weight		1.15 kg
Hose		8 mm
Dimensions axbxc		152x157x38 mm
Air cons.		410 l/min
Air cons.		570 l/min
Air inlet		1/4" BSP IG
Sound LpA		71 dB(A)
Vibration		3.2 m/s <sup>2</sup>

Model		RC7120
Drive		5/8" AG
Disc		178 mm
Power		500 W
Speed		4500 rpm
Weight		2 kg
Hose		8 mm
Dimensions axbxc		320x38x100 mm
Air cons.		525 l/min
Air cons.		700 l/min
Air inlet		1/4" IG
Sound LpA		91.4 dB(A)
Vibration		2.7 m/s <sup>2</sup>

**Direct Drive - Composite**

**For flexible fibre disc up to 115 mm**

**For flexible fibre disc up to 178 mm**



- For spot repairs - paint repairs limited to a small area, saving time and consumables
- Lightweight and handy tool with composite housing
- Speed regulator with thumb knob for one hand operation
- Air exhaust down motor housing


Set RC7681 consists of:

- 1 Pistol grinder
- 1 backing pad 50 mm (2") Roloc®
- 1 backing pad 75 mm (3") Roloc®
- 1 abrasive 50 mm (2") fine
- 1 abrasive 75 mm (3") fine
- 1 abrasive 50 mm (2") medium
- 1 abrasive 75 mm (3") medium
- 1 abrasive 50 mm (2") coarse
- 1 abrasive 75 mm (3") coarse
- 1 tool box

- Fast pistol sander with adjustable speed (and power) for fibre discs
- For safety reasons this tool cannot be used with hard cutting and grinding discs, please see our models 7160 - 7166 with speed governor

- With 5/8" thread and 178 mm backing pad
- Ergonomically optimised angle grinder with cold-insulated handle
- Silencer and rear exhaust
- Easy maintenance grease plug for fast regreasing of the angle gear
- Additional side handle can be mounted on both sides for both left and right handed persons

# ANGLE GRINDER

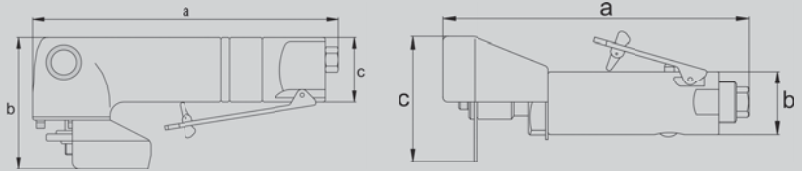

Model	Part#	
RC7160	8951075021	100x16 mm
RC7166	8951075051	115x22 - 125x22 mm

Model	Part#	
RC7171	8951000210	100x16mm
RC7172	8951000211	115x22mm
RC7173	8951000212	125x22mm

Model	Part#
RC7190	8951075101

Model	RC7160	RC7166
Drive	M10x1,5 AG	M14x2,0 AG
Disc x hole	100x16 mm	115x22 - 125x22 mm
Power	750 W	750 W
Speed	10000 rpm	10000 rpm
Weight	1.6 kg	1.6 kg
Hose	8 mm	8 mm
Dim. axbxc	232x93x47 mm	232x93x47 mm
Air cons.	490 l/min	490 l/min
Air cons.	650 l/min	650 l/min
Air inlet	1/4" IG	1/4" IG
Sound LpA	85.2 dB(A)	85.6 dB(A)
Vibration	4.56 m/s <sup>2</sup>	5.69 m/s <sup>2</sup>

For discs 100 to 125 mm

Model	RC7171	RC7172	RC7173
Drive	M10	M10	M14
Disc x hole	100x16 mm	115x22 mm	125x22 mm
Power	700 W	700 W	
Speed	12000 rpm	12000 rpm	
Weight	1.4 kg	1.5 kg	1.5 kg
Hose	10 mm	10 mm	
Dim. axbxc	245x80x125 mm		
Air cons.	324 l/min		
Air cons.	540 l/min		
Air inlet	1/4" IG		
Sound LpA	84 dB (A)		
Vibration	7,2 m/s <sup>2</sup>	9 m/s <sup>2</sup>	9,4 m/s <sup>2</sup>

For discs 100 to 125 mm

Model	RC7190
Drive	3/8"
Disc	70x10 mm
Power	350 W
Speed	20000 rpm
Weight	0.8 kg
Hose	8 mm
Dim. axbxc	195x80x40 mm
Air cons.	430 l/min
Air cons.	580 l/min
Air inlet	1/4" IG
Sound LpA	89.5 dB(A)
Vibration	3.53 m/s <sup>2</sup>

Mini cutting discs up to 70 mm



- Compact angle grinders
- With safety speed governor, protective guard and flanges
- Very versatile for many applications such as sanding with flap discs, grinding, cutting
- Available for 16 or 22 mm centre hole accessories or pads and brushes with thread M14x2
- Side handle for additional control can be taken off for confined areas



- 700 W
- 1000 hour service interval
- High quality bevel gears & Governed motor
- Rear exhaust (exhaust hose included)
- Streamline composite handle for either right or left handed operation
- Composite grip insulates operator's hand from cold
- Designed for a variety of applications such as sanding with flap discs, grinding and cutting



- Mini cutting grinder with steel guard and safety lever
- Rear exhaust
- Delivery includes 1 disc

## Grinders Tune up Kit


Model	Part#
RC7171/72/73	8950280070



## Maximum power and optimal speed

Superior durability and performance are granted by the built-in high quality bevel gear with spiral teeth and the governed motor.

# CUTTING GRINDER & BELT SANDER



**Model** RC7170  
**Part#** 8951000144

**Model** RC7155  
**Part#** 8951072041

**Model** RC7156  
**Part#** 8951072051

Model		RC7170
Drive		3/8"
Disc x hole		100x10 mm
Power		746 W
Speed		14000 rpm
Weight		1.8 kg
Hose		10 mm
Dim. axbxc		75x110x370 mm
Air cons.		199 l/min
Air cons.		216 l/min
Air inlet		1/4" IG
Sound LpA		86 dB(A)
Vibration		3 m/s <sup>2</sup>
<b>4" extended cutting grinder</b>		

Model		RC7155
Belt size		10x330 mm
Power		300 W
Speed		18000 rpm
Weight		0.8 kg
Hose		8 mm
Dim. axbxc		285x37x22 mm
Air cons.		400 l/min
Air cons.		520 l/min
Air inlet		1/4" BSP IG
Sound LpA		79.5 dB(A)
Vibration		2.5 m/s <sup>2</sup>
<b>10 mm belts</b>		

Model		RC7156
Belt size		20x520 mm
Power		370 W
Speed		17000 rpm
Weight		1.15 kg
Hose		8 mm
Dim. axbxc		353x44x35x22 mm
Air cons.		400 l/min
Air cons.		520 l/min
Air inlet		1/4" BSP IG
Sound LpA		83.2 dB(A)
Vibration		2.4 m/s <sup>2</sup>
<b>20 mm belts</b>		



- 4" = 100 mm for better reach and easy access to restricted areas
- Composite grip to reduce cold air transmission to operators
- Spindle lock system for easier wheel changing
- 11 position adjustable swivel guard – 126° adjustable for better operator protection & greater visibility of cutting operations
- Safety throttle lever to prevent accidental start up
- Supplied with 5 cutting wheels



- Small belt sander for confined areas
- Fast-tensioning mechanism allows exchanging of belts one-handed
- For ergonomic working handle can be adjusted in angle
- Delivery includes 3 belts (grid 80, 100 and 120)




- Tool can be used 100% into corners since the arm does not disturb on the side of the belt
- Fast-tensioning mechanism allows exchanging of belts one-handed
- Ergonomic working handle can be adjusted to different angles
- Continuous work is made more comfortable due to a broad resting plate for the second hand

01  
02  
03  
04  
05  
06  
07  
08  
09  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20

# RANDOM ORBITAL SANDER












www.rodcraft.com

























**Model** Part#  
**RC7682** 8951000005  
**RC7682K** 8951000018

**Model** Part#  
**RC7661V** 8951072231

**Model** Part#  
**RC7200V** 8951072111

Model	RC7682	
Disc ø & thread		50 mm (2") - 75 mm (3") AG
Orbit		5 mm
Speed		15000 rpm
Weight		0.5 kg
Hose		8 mm
Dimensions axbxc		260x165x37 mm
Air cons.		380 l/min
Air cons.		510 l/min
Air inlet		1/4" IG
Sound LpA		79.6 dB(A)
Vibration		8.9 m/s <sup>2</sup>
<b>Combi sander 5 mm stroke</b>		

Model	RC7661V	
Disc ø & thread		77 mm - 5/16" AG
Orbit		2.5 mm
Speed		10000 rpm
Weight		1 kg
Hose		8 mm
Dimensions axbxc		260x165x37 mm
Air cons.		350 l/min
Air cons.		430 l/min
Air inlet		1/4" IG
Sound LpA		88 dB(A)
Vibration		3.5 m/s <sup>2</sup>
<b>Stroke 2.5 mm - Spot-Repair</b>		

Model	RC7200V	
Disc ø & thread		150 mm - 5/16" AG
Orbit		5 mm
Speed		10000 rpm
Weight		1.95 kg
Hose		8 mm
Dimensions axbxc		260x165x37 mm
Air cons.		315 l/min
Air cons.		400 l/min
Air inlet		1/4" IG
Sound LpA		86.2 dB(A)
Vibration		8.3 m/s <sup>2</sup>
<b>Combi sander 5 mm stroke</b>		



- For spot repairs - paint repairs limited to small areas
- Ergonomic composite housing
- Speed regulator with thumb knob for one hand operation
- Air exhaust down motor housing
- 75 mm pad
- 5 mm stroke

**RC7682K** **8951000018**  
 Content:

- 1 pistol sander
- 1 velcro pad 50 mm (2")
- 1 velcro pad 75 mm (3")
- 10 abrasives 50 mm grain 600
- 10 abrasives 75 mm grain 600
- 10 abrasives 50 mm grain 320
- 10 abrasives 75 mm grain 320
- 10 abrasives 50 mm grain 180
- 10 abrasives 75 mm grain 180
- 1 tool box



- Spot-repair orbital sander with 2,5 mm stroke and small pad
- Ideal for dust enclosures, irregularities or on very rounded surfaces
- Comfortably rounded shape
- Insulating rubber cover and speed regulator
- Equipped with velcro pad



- Combi-tool for coarse sanding and finishing in one
- Can easily be switched from a rotating coarse sander to a random orbital sander with 5 mm stroke
- Equipped with 150 mm velcro pad

# Ergonomic, powerful, comfortable - all in one hand!

285 W motor with 5 vanes  
for efficient sanding even  
with large stroke and coarse grid

Elegantly designed  
composite lever

Knob for adjustment of the right  
speed for the application,  
easy to reach for usability with one hand

Sanders are delivered with  
two interchangeable suction  
ports with diameters 29  
and 27 mm for central dust  
extraction units

With high quality bearings  
and excellent dust protection  
for continuous sanding




15 hole - 150 mm diameter RODCRAFT  
micro-velcro pad good for all most used  
abrasive sheets (6 hole, 6+1 hole and 8+1 hole).

**RC7702V6**

# RANDOM ORBITAL SANDER

www.rodcraft.com



Model	Part#	Orbit
RC7702V6	8951000021	2.5 mm
RC7705V6	8951000020	5 mm
RC7710V6	8951000070	10 mm

Model	Part#	Orbit
RC7705V6-2H	8951000081	5 mm
RC7710V6-2H	8951000082	10 mm

Model	Part#
RC7691V	8951072212

Model	RC7702V6	RC7705V6	RC7710V6
Disc ø & thread	150 mm - 5/16" AG		
Orbit	2.5 mm	5 mm	10 mm
Speed	10000 rpm		
Weight	0.825 kg	0.85 kg	0.945 kg
Hose	8 mm		
Dim. axbxc	206x107 mm		
Air cons. average	450 l/min		
Air cons. cont.	550 l/min		
Air inlet	1/4" IG		
Sound LpA	79.5 dB(A)	86.1 dB(A)	79.1 dB(A)
Vibration	3.8 m/s <sup>2</sup>	5.4 m/s <sup>2</sup>	9 m/s <sup>2</sup>

Ergonomic design - Velcro pad 150 mm



- 1 hand orbital sander with ergonomic design
- Innovative swivel for exhaust to allow left and right hand work
- Only 107 mm high
- Insulating thermo rubber against cold and for good grip
- Change speed regulator with one hand while working
- Delivered with two interchangeable suction ports with diameters 29 and 27 mm
- Equipped with 150 mm velcro pad with 15 holes

Model	RC7705V6-2H	RC7710V6-2H
Disc ø & thread	150 mm - 5/16" AG	
Orbit	5 mm	10 mm
Speed	10000 rpm	
Weight	1 kg	1.1 kg
Hose	8 mm	
Dim. axbxc	315x107 mm	
Air cons. average	450 l/min	
Air cons. cont.	550 l/min	
Air inlet	1/4" IG	
Sound LpA	83.5 dB(A)	
Vibration	5.1 m/s <sup>2</sup>	7.9 m/s <sup>2</sup>

Rear exhaust 5 & 10 mm orbit



- 2 hand orbital sander with ergonomic design
- Innovative swivel for exhaust to allow left and right hand work
- Only 107 mm high
- Insulating thermo rubber against cold and for good grip
- Change speed regulator with one hand while working
- Delivered with two interchangeable suction ports with diameters 29 and 27 mm
- Equipped with 150 mm velcro pad with 15 holes
- Rear exhaust
- 5 mm stroke


Model	RC7691V
Disc ø & thread	200 mm - 6xM4
Orbit	5 mm
Speed	10000 (900) rpm
Weight	2.1 kg
Hose	8 mm
Dimensions axbxc	300x120 mm
Air cons. average	340 l/min
Air cons. cont.	420 l/min
Air inlet	1/4" IG
Sound LpA	88.6 dB(A)
Vibration	2.8 m/s <sup>2</sup>

Composite 200 mm pad



- 200 mm two-hand sanders with powerful 8-vane motor
- Adjustable speed
- Composite material handle
- Motor housing insulated against the transfer of cold – for long sanding operations
- Equipped with a 29 mm suction port for use with central dust extraction
- Orbital sander + rotation: sander that simultaneously rotates the pad as well as moving it on an orbit (geared sanders) – typical for aggressive sanding applications
- Equipped with 200 mm velcro pad with 8 holes 8951012348
- Pad is fixed with 6 bolts

# LINEAR SANDER ACCESSORIES

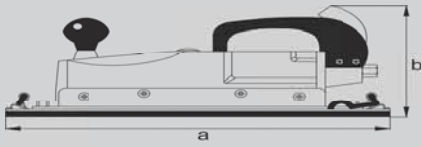

**Model**    **Part#**  
**RC7500**   **8951072101**

Model		RC7500
Pad		65 x 390 C
Stroke		linear 25 mm
Speed		3500 rpm
Weight		2.7 kg
Hose		8 mm
Dimensions axbxc		400x170 mm
Air cons.		200 l/min
Air cons.		250 l/min
Air inlet		1/4" IG
Sound LpA		80.1 dB(A)
Vibration		21.3 m/s <sup>2</sup>

## Combi sander 5 mm stroke



- Tool makes forward-reverse movements for profiling and sanding of surfaces with lots of filler (e.g. repairs of dented car doors)
- Equipped with a non-perforated long sanding pad and clamps for normal abrasives

## Sanders Tune up Kit

Model	Part#
RC7682 SMART REP	8950280015
RC7682K	8950280015
RC7705V6	8950280041
RC7702V6	8950280041
RC7710V6	8950280041
RC7805V6	8950280041



**Model**    **Part#**  
**7905**    *895100016*

**Model**    **Part#**  
**7910**    *8951089014*

Model	7905
Peak power/ Power	1400/1200 W
Tank	21 L
Suction flow	215 m <sup>3</sup> /h - 3583 l/min
Suction height (water)	2400 mm H <sub>2</sub> O
Electr. sockets	1x2000 W
Filter surface	2700 cm <sup>2</sup>
Dimensions	415x415x550 mm
Weight	10 kg
Air supply pressure	4 - 16 bar
Sound LpA	65 dB(A)

Model	7910
Peak power/ Power	2600/2300 W
Tank	77 L
Suction flow	430 m <sup>3</sup> /h - 7150 l/min
Suction height (water)	2400 mm H <sub>2</sub> O
Electr. sockets	2x600 W
Filter surface	5700 cm <sup>2</sup>
Dimensions	608x608x1060 mm
Weight	25,1 kg
Air supply pressure	4 - 15 bar
Sound LpA	67 dB(A)

- The dust extraction units comply with class "L" requirements for filters (according to EN 60335-2-69:1999-08)
- The air tools and electrical tools can be attached directly onto the energy supply from the vacuum station
- Automatic stop for vacuum (10 sec delay) after switching off all connected tools. The vacuum hose is emptied, avoiding clogs. Easy remote controlled start of the vacuum system from any connected tool as soon as one of them is started
- Equipped for wet and dry applications with integrated sensor

- Compact version with 21L tank
- 1 motor by-pass cooled
- 1 electrical socket
- 1 suction hose model 7900/10SC
- With nylon bag and class L fleece filter

- 77 L tank
- 2 motors two-step (operation with one motor possible to save energy) – by-pass cooled
- 2 electrical sockets and diverter for 2 suction hoses with nylon bag and class L fleece filter
- Basket for accessories or sander
- Practical joint to tilt the tank for fast and easy emptying
- Sufficient vacuum to work with 2 sanders
- Simultaneously - possible to operate 2 air tools with compressed air when using an additional air diverter model 7910VD (part# 8951011130)

