

AIR IMPACT WRENCH

TOP SALES



NC-4255Q NC-4265Q

1/2" DRIVE AIR IMPACT WRENCH Twin Hammer Type
Air inlet : 1/4"

NC-4265 is equipped with 2" extended anvil

8 pieces in one carton

PATENT
GREASE
HOLE

FOR EZ GREASE
VERSION ONLY



NC-4255QP NC-4255QHP

(EZ GREASE ANVIL)

WITH PROTECTIVE COVER INSIDE

8 pieces in one carton

FEATURES

- The front housing & back head cover made by magnesium alloy
- Durability composite material

PATENT
GREASE
HOLE

FOR EZ GREASE
VERSION ONLY



NC-4255QH

EZ GREASE ANVIL



"IMPOSSIBLE"

Is Not A Big Word Anymore

The world's lightest and
most powerful

NC-4255PVC

PROTECTIVE COVER



	Square Drive Inch	Bolt Capacity Inch (mm)	Torque Range FT-LB (Nm)	Max Torque FT-LB Nm	Free Speed R.P.M	Avg. Air Consumption CFM (L/min)	Air Pressure PSI (bar)	Overall Length Inch (mm)	Net Weight LBS kg	Air Hose Inch	Sound Pressure dBA	Vibration Level m/s ²
NC-4255Q	1/2"	1"(25)	200-800(271-1085)	1200 1627	8500	4.8(136)	90(6.3)	7-1/32"(179)	3.7 1.70	3/8"	85.0	4.7
NC-4255QP	1/2"	1"(25)	200-800(271-1085)	1200 1627	8500	4.8(136)	90(6.3)	7-1/32"(179)	4.0 1.80	3/8"	85.0	4.7
NC-4255QH	1/2"	1"(25)	200-800(271-1085)	1200 1627	8500	4.8(136)	90(6.3)	7-1/32"(179)	3.7 1.70	3/8"	85.0	4.7
NC-4265Q	1/2"	1"(25)	200-800(271-1085)	1200 1627	8500	4.8(136)	90(6.3)	9-1/32"(230.5)	4.0 1.80	3/8"	85.0	4.7

AIR IMPACT WRENCH



NC-3610Q

3/8" DRIVE AIR IMPACT WRENCH

Jumbo Hammer Type
Air inlet : 1/4"

10 pieces in one carton



NC-3210

3/8" DRIVE AIR IMPACT WRENCH

Twin Hammer Type
Air inlet : 1/4"

10 pieces in one carton



NC-3831

3/8" DRIVE AIR IMPACT WRENCH

Twin Dog Type
Air inlet : 1/4"

10 pieces in one carton



NC-398 NC-498

3/8"&1/2" DRIVE AIR ANGLE IMPACT WRENCH

Jumbo Hammer Type Air inlet : 1/4"

10 pieces in one carton



NC-3410

3/8" DRIVE AIR IMPACT WRENCH

Rocking Dog Type
Air inlet : 1/4"

20 pieces in one carton



NC-3810

3/8" DRIVE AIR IMPACT WRENCH

Twin Dog Type
Air inlet : 1/4"
 • Butterfly type forward/reverse trigger
 • 180 degree turnaround air inlet
 • Three speed adjusting switch

20 pieces in one carton



Air impact wrench



NC-3910

3/8" DRIVE AIR IMPACT WRENCH

Twin Dog Type
Air inlet : 1/4"

12 pieces in one carton



NC-3911

3/8" DRIVE AIR IMPACT WRENCH

Twin Dog Type
Air inlet : 1/4"

12 pieces in one carton



RA-111

3/8" DRIVE AIR IMPACT WRENCH

Twin Hammer Type
Air inlet : 1/4"

20 pieces in one carton




NC-3812

3/8" DRIVE AIR IMPACT WRENCH

Twin Dog Type
Air inlet : 1/4"

12 pieces in one carton

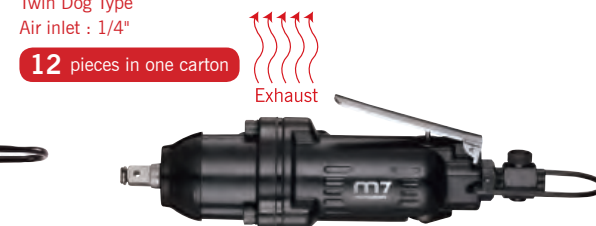

	Square Drive	Bolt Capacity	Torque Range	Max Torque		Free Speed	Avg. Air Consumption	Air Pressure	Overall Length	Net Weight		Air Hose	Sound Pressure	Vibration Level
	Inch	Inch (mm)	FT-LB (Nm)	FT-LB	Nm	R.P.M	CFM (L/min)	PSI (bar)	Inch (mm)	LBS	kg	Inch	dBA	m/s ²
NC-3210	3/8"	1/2"(13)	100-300(136-407)	350	474	10000	4.0(113)	90 (6.3)	5-5/8" (142)	3.3	1.50	3/8"	92.1	3.6
NC-3410	3/8"	3/8"(10)	5-50(7-68)	75	102	10000	2.5(71)	90 (6.3)	6-1/4" (159)	1.7	0.80	3/8"	92.1	3.6
NC-3610Q	3/8"	1/2"(13)	100-300(136-407)	350	474	8000	4.4(124)	90 (6.3)	4-9/16" (155.5)	3.3	1.50	3/8"	85.0	2.8
NC-3810	3/8"	3/8"(10)	5-50(7-68)	75	102	11000	2.3(65)	90 (6.3)	5-15/32" (139)	1.1	0.50	3/8"	91.0	3.6
NC-3812	3/8"	M10~M12	60-120(81-162)	180	244	8000	10(283)	90 (6.3)	7-31/64" (190)	2.3	1.06	3/8"	97.0	5.1
NC-3831	3/8"	15/32"(M12)	80-120(108-162)	180	244	8000	10(283)	90 (6.3)	7-9/32" (185)	2.9	1.34	3/8"	93.0	4.9
NC-3910	3/8"	5/16"(8)	5-37(7-50)	66	90	8500	8.5(240)	90 (6.3)	10-7/16"(265)	3.5	1.60	3/8"	90.0	5.1
NC-3911	3/8"	3/8"(10)	5-44(7-60)	96	130	7000	7.0(198)	90 (6.3)	9-7/16"(240)	3.5	1.60	3/8"	90.0	5.1
RA-111	3/8"	5/16" (8)	3.7-36.9(5-50)	50	68	8500	8.5(255)	90 (6.3)	8-1/4"(208)	2.2	1.0	3/8"	96.7	4.9
NC-398	3/8"	9/16"(14)	50-200(68-271)	300	405	6500	4.2(119)	90(6.3)	9-3/4"(247)	3.0	1.37	3/8"	85.0	2.0
NC-498	1/2"	5/8"(16)	80-300(108-405)	400	542	6500	4.2(119)	90(6.3)	9-3/4"(247)	3.0	1.37	3/8"	85.0	2.0

AIR IMPACT WRENCH



NC-4233Q NC-4233QH (EZ GREASE ANVIL)

1/2" DRIVE AIR IMPACT WRENCH Twin Hammer Type Air inlet : 1/4"



- Rotor blades attached with springs which prolong durability.
- Shorter air inlet path to boost air efficiency
- simple mechanism for easy maintenance
- Air inlet 360 degree swivel.
- Composite material light design
- 3 setting forward power regulator for controlled run up.



45%
Lighter

PATENT
GREASE
HOLE

FOR EZ GREASE
VERSION ONLY



Exhaust
~~~~~



## NC-4233TL (TORQUE LIMITED)

**1/2" DRIVE AIR IMPACT WRENCH**

Twin Hammer Type Air inlet : 1/4"

**8 pieces in one carton**

- Forward operation torque is limited  
50 ~ 80 Nm for vehicle tire service.
- 6 rotor-blades makes efficient starting torque.



Exhaust  
~~~~~



NC-4236 NC-4236Q

1/2" DRIVE AIR IMPACT WRENCH

Twin Hammer Type Air inlet : 1/4"

8 pieces in one carton

60%
more
Powerful



Exhaust
~~~~~



## NC-4610 NC-4610Q

**1/2" DRIVE AIR IMPACT WRENCH** Jumbo Hammer Type  
Air inlet : 1/4"

- Best in class performance for a tool of just 115.5 mm long and weight 1.6 Kg.
- The minimum size of this tool will allow greater access to tight and limited spaces.
- Small but with greater power. Reach 450-ft-lb in just 5 seconds.
- Low noise sound level 85 db.
- Common application to narrow working place and Agricultural maintenance.
- Powerful yet compact.

10 pieces in one carton

**64%**  
Lighter

**60%**  
Shorter



## NC-4256 NC-4256Q NC-4266

**1/2" DRIVE AIR IMPACT WRENCH**

Twin Hammer Type  
Air inlet : 1/4"

NC-4266 is equipped with 2" extended anvil

10 pieces in one carton



## NC-4258

**1/2" DRIVE AIR IMPACT WRENCH**

Twin Hammer Type  
Air inlet : 1/4"

8 pieces in one carton



|           | Square Drive | Bolt Capacity | Torque Range      | Max Torque |      | Free Speed | Avg. Air Consumption | Air Pressure | Overall Length | Net Weight |      | Air Hose | Sound Pressure | Vibration Level  |
|-----------|--------------|---------------|-------------------|------------|------|------------|----------------------|--------------|----------------|------------|------|----------|----------------|------------------|
|           | Inch         | Inch (mm)     | FT-LB (Nm)        | FT-LB      | Nm   | R.P.M      | CFM (L/min)          | PSI (bar)    | Inch (mm)      | LBS        | kg   | Inch     | dBA            | m/s <sup>2</sup> |
|           |              |               |                   |            |      |            |                      |              |                |            |      |          |                |                  |
| NC-4233Q  | 1/2"         | 3/4"(19)      | 200-500(271-678)  | 850        | 1152 | 9000       | 4.6(132)             | 90(6.3)      | 7-1/2"(190)    | 4.6        | 2.10 | 3/8"     | 85.0           | 4.4              |
| NC-4233QH | 1/2"         | 3/4"(19)      | 200-500(271-678)  | 850        | 1152 | 9000       | 4.6(132)             | 90(6.3)      | 7-1/2"(190)    | 4.6        | 2.10 | 3/8"     | 85.0           | 4.4              |
| NC-4233TL | 1/2"         | 3/4"(19)      | 37-59(50-80)      | 850        | 1152 | 2800       | 4.6(132)             | 90(6.3)      | 7-1/2"(190)    | 4.6        | 2.10 | 3/8"     | 85.0           | 4.4              |
| NC-4236   | 1/2"         | 1"(25)        | 200-700(271-949)  | 1000       | 1350 | 7500       | 5.5(155)             | 90(6.3)      | 6-45/64"(171)  | 5.7        | 2.60 | 3/8"     | 87.0           | 4.5              |
| NC-4236Q  | 1/2"         | 1"(25)        | 200-700(271-949)  | 1000       | 1350 | 7500       | 5.5(155)             | 90(6.3)      | 6-45/64"(171)  | 5.7        | 2.60 | 3/8"     | 83.0           | 4.5              |
| NC-4256   | 1/2"         | 1"(25)        | 200-900(271-1220) | 1100       | 1491 | 7000       | 5.1(144)             | 90(6.3)      | 5-9/16"(141)   | 4.0        | 1.80 | 3/8"     | 95.0           | 2.8              |
| NC-4256Q  | 1/2"         | 1"(25)        | 200-900(271-1220) | 1000       | 1356 | 7000       | 5.1(144)             | 90(6.3)      | 5-9/16"(141)   | 4.0        | 1.80 | 3/8"     | 85.0           | 2.8              |
| NC-4266   | 1/2"         | 1"(25)        | 200-900(271-1220) | 1000       | 1356 | 7000       | 5.1(144)             | 90(6.3)      | 7-9/16"(191)   | 4.2        | 1.90 | 3/8"     | 85.0           | 2.8              |
| NC-4610   | 1/2"         | 5/8"(16)      | 200-350(271-475)  | 450        | 610  | 9000       | 4.4(124)             | 90 (6.3)     | 4-9/16"(115.5) | 3.5        | 1.60 | 3/8"     | 93.0           | 2.8              |
| NC-4610Q  | 1/2"         | 5/8"(16)      | 200-350(271-475)  | 400        | 542  | 9000       | 4.4(124)             | 90 (6.3)     | 4-9/16"(115.5) | 3.5        | 1.60 | 3/8"     | 85.0           | 2.8              |
| NC-4258   | 1/2"         | 5/8"(16)      | 150-300(203-407)  | 400        | 542  | 7000       | 4.2(119)             | 90(6.3)      | 7-1/4"(185)    | 5.6        | 2.50 | 3/8"     | 93.0           | 4.4              |

# AIR IMPACT WRENCH



## NC-4650 NC-4650H

**1/2" DRIVE AIR IMPACT WRENCH** Jumbo Hammer Type  
Air inlet : 1/4"

10 pieces in one carton

### FEATURES

- + Ergonomic design, lightweight 1.4kg
- + Excellent Max torque 900NM(650FT/LB)
- + Mini type with overall length 104mm, ultralight and easy to use.

## NC-4650H

EZ GREASE



PATENT  
GREASE  
HOLE  
FOR EZ GREASE  
VERSION ONLY



## NC-4611Q

**1/2" DRIVE AIR IMPACT WRENCH**

Jumbo Hammer Type  
Air inlet : 1/4"

m7 3rd generation super mini  
in length **111mm**.

10 pieces in one carton



## NC-4620QN

**1/2" DRIVE AIR IMPACT WRENCH**

Jumbo Hammer Type  
Air inlet : 1/4"

10 pieces in one carton

- 2" Extended Anvil matching special double sided socket 17mm & 19mm and 21mm & 22mm specifically for automotive tyres.
- Reduce physical loading 40%.



## NC-4630 NC-4630Q

**1/2" DRIVE AIR IMPACT WRENCH**

Jumbo Hammer Type  
Air inlet : 1/4"

10 pieces in one carton

**68%**  
Lighter

**60%**  
Shorter



## NC-4811

**1/2" DRIVE AIR IMPACT WRENCH**

Twin Dog Type  
Air inlet : 1/4"

12 pieces in one carton







## NC-4210N

**1/2" DRIVE AIR  
IMPACT WRENCH**

Twin Hammer Type Air inlet : 1/4"

**10** pieces in one carton

- stubby impact sockets,  
6 points:5pcs 13,17,19,22,24 mm



## NC-4610N

**1/2" DRIVE AIR  
IMPACT WRENCH**

Junbo Hammer Type Air inlet : 1/4"

**10** pieces in one carton

- stubby impact sockets,  
6 points:5pcs 13,17,19,22,24 mm



|           | Square Drive | Bolt Capacity | Torque Range      | Max Torque |     | Free Speed | Avg. Air Consumption | Air Pressure | Overall Length | Net Weight |      | Air Hose | Sound Pressure | Vibration Level |
|-----------|--------------|---------------|-------------------|------------|-----|------------|----------------------|--------------|----------------|------------|------|----------|----------------|-----------------|
|           | Inch         | Inch (mm)     | FT-LB (Nm)        | FT-LB      | Nm  | R.P.M      | CFM (L/min)          | PSI (bar)    | Inch (mm)      | LBS        | kg   | Inch     | dBA            | m/s²            |
|           |              |               |                   |            |     |            |                      |              |                |            |      |          |                |                 |
| NC-4650   | 1/2"         | 5/8"(16)      | 180-400(244-542)  | 650        | 900 | 9000       | 4.69(132.8)          | 90(6.3)      | 4-1/16"(104)   | 3.3        | 1.40 | 3/8"     | 95.0           | 2.4             |
| NC-4650H  | 1/2"         | 5/8"(16)      | 180-400(244-542)  | 650        | 900 | 9000       | 4.69(132.8)          | 90(6.3)      | 4-1/16"(104)   | 3.3        | 1.40 | 3/8"     | 95.0           | 2.4             |
| NC-4611Q  | 1/2"         | 5/8"(16)      | 200-350(271-475)  | 450        | 610 | 10000      | 4.0(113)             | 90(6.3)      | 4-3/8"(111)    | 3.3        | 1.50 | 3/8"     | 85.0           | 2.8             |
| NC-4620QN | 1/2"         | 5/8"(16)      | 200-350(271-475)  | 450        | 610 | 9000       | 4.4(124)             | 90(6.3)      | 6-9/16"(166)   | 3.7        | 1.70 | 3/8"     | 85.0           | 2.8             |
| NC-4630   | 1/2"         | 5/8"(16)      | 100-400(136-475)  | 550        | 746 | 10000      | 4.4(124)             | 90(6.3)      | 3-27/32"(97)   | 3.3        | 1.50 | 3/8"     | 96.0           | 2.8             |
| NC-4630Q  | 1/2"         | 5/8"(16)      | 100-400(136-475)  | 550        | 746 | 10000      | 4.4(124)             | 90(6.3)      | 3-27/32"(97)   | 3.3        | 1.50 | 3/8"     | 85.0           | 2.8             |
| NC-4811   | 1/2"         | 9/16"(M14)    | 100-140 (136-189) | 200        | 271 | 5500       | 8.5(240)             | 90(6.3)      | 10-9/32" (260) | 3.7        | 1.70 | 3/8"     | 85.0           | 5.3             |
| NC-4210N  | 1/2"         | 5/8"(16)      | 150-350(203-475)  | 400        | 542 | 10000      | 4.2(119)             | 90(6.3)      | 5-5/8"(142)    | 3.5        | 1.60 | 3/8"     | 90.6           | 2.8             |
| NC-4610N  | 1/2"         | 5/8"(16)      | 200-350(271-475)  | 450        | 610 | 9000       | 4.4(124)             | 90(6.3)      | 4-9/16"(115.5) | 3.5        | 1.60 | 3/8"     | 93.0           | 2.8             |



# AIR IMPACT WRENCH



## NC-4130

**1/2" DRIVE AIR IMPACT WRENCH**

Pin clutch Type  
Air inlet : 1/4"

10 pieces in one carton

**1.2**  
**m/s<sup>2</sup>**  
**VIBRATION LOW**



- Low vibration for working
- Clutch delivers smooth and comfortable operation
- Mini size tool body ,ultralight and easy use.
- One-handed forward / reverse button with 3 position power settings
- Compact and ergonomic design with rubber grip
- General Maintenance
- Robust housing and oil bath clutch provide durability Versatile tool
- ideal for all general repairs and maintenance applications



## NC-4232Q

**1/2" DRIVE AIR IMPACT WRENCH**

Twin Hammer Type  
Air inlet : 1/4"

10 pieces in one carton



## WON PTEN Air tools U.S.A

- Sophisticated and powerful tool: m7's most advanced composite mini air impact wrench that can use in narrow space.
- Unbelievable light and compact with only 1.35kg
- Quiet series: sound pressure only 83 DbA
- "m7's unique lazy design" that can operate forward/reverse switch with one hand.
- Twin-hammer impact mechanism provides more torque power and stability, and balanced impact can reduce the vibration.
- Ergonomic switch design well suited for operator's hand that provides fingers with most comfortability and controllability.
- m7's unique shark fin shaped body design that creates an esthetics of speed and explosiveness.



## NC-4210

**1/2" DRIVE AIR IMPACT WRENCH**

Twin Hammer Type  
Air inlet : 1/4"

10 pieces in one carton

**64%**  
Lighter

**30%**  
Shorter



## NC-4230 NC-4230Q NC-4240

**1/2" DRIVE AIR IMPACT WRENCH**

Twin Hammer Type  
Air inlet : 1/4"

NC-4240 is equipped with 2" extended anvil

8 pieces in one carton





## NC-4216 NC-4226

**1/2" DRIVE AIR  
IMPACT WRENCH**

Twin Hammer Type

Air inlet : 1/4"

NC-4226 is equipped with 2" extended anvil

**45%**  
Lighter

10 pieces in one carton



## NC-4230NE

5 Sets in one carton

**1/2" DRIVE AIR  
IMPACT WRENCH & RATCHET WRENCH**

Twin Hammer Type

Air inlet : 1/4"

- NC-4230 :1/2" Drive Air Impact Wrench Twin Hammer
- NE-432 :1/2" Push Air Ratchet Wrench
- 1/4" Air Adaptor Couplings Male Thread Type
- Mini socket set, size:13,17,19,22,24mm



|          | Square Drive | Bolt Capacity | Torque Range     | Max Torque |     | Free Speed | Avg. Air Consumption | Air Pressure | Overall Length | Net Weight |      | Air Hose | Sound Pressure | Vibration Level |
|----------|--------------|---------------|------------------|------------|-----|------------|----------------------|--------------|----------------|------------|------|----------|----------------|-----------------|
|          | Inch         | Inch (mm)     | FT-LB (Nm)       | FT-LB      | Nm  | R.P.M      | CFM (L/min)          | PSI (bar)    | Inch (mm)      | LBS        | kg   | Inch     | dBA            | m/s²            |
|          |              |               |                  |            |     |            |                      |              |                |            |      |          |                |                 |
| NC-4130  | 1/2"         | 5/8"(16)      | 180-400(244-542) | 600        | 813 | 9000       | 4.5(127)             | 90(6.3)      | 5-9/16"(142)   | 3.55       | 1.61 | 3/8"     | 93             | 1.2             |
| NC-4210  | 1/2"         | 5/8"(16)      | 150-350(203-475) | 400        | 542 | 10000      | 4.2(119)             | 90 (6.3)     | 5-5/8"(142)    | 3.5        | 1.60 | 3/8"     | 90.6           | 2.8             |
| NC-4230  | 1/2"         | 3/4"(19)      | 180-500(244-678) | 700        | 949 | 7500       | 4.5(127)             | 90(6.3)      | 5-15/32"(164)  | 5.5        | 2.50 | 3/8"     | 87             | 4.5             |
| NC-4230Q | 1/2"         | 3/4"(19)      | 180-500(244-678) | 650        | 881 | 6500       | 4.5(127)             | 90(6.3)      | 6-15/32"(164)  | 5.5        | 2.50 | 3/8"     | 85             | 4.5             |
| NC-4232Q | 1/2"         | 5/8"(16)      | 100-400(136-542) | 550        | 746 | 10000      | 4.0(113)             | 90(6.3)      | 4-3/4"(120)    | 3.0        | 1.38 | 3/8"     | 83             | 3.7             |
| NC-4240  | 1/2"         | 3/4"(19)      | 180-500(244-678) | 700        | 949 | 7500       | 4.5(127)             | 90(6.3)      | 8-15/32"(215)  | 5.7        | 2.60 | 3/8"     | 87             | 4.5             |
| NC-4216  | 1/2"         | 5/8"(16)      | 180-400(244-542) | 650        | 881 | 9000       | 4.2(119)             | 90(6.3)      | 7-3/4"(195)    | 4.4        | 2.00 | 3/8"     | 93.9           | 4.5             |
| NC-4226  | 1/2"         | 5/8"(16)      | 180-400(244-542) | 650        | 881 | 9000       | 4.2(119)             | 90(6.3)      | 8-7/8"(225)    | 4.8        | 2.20 | 3/8"     | 93.9           | 4.5             |

# AIR IMPACT WRENCH

## NC-4255PVC

Protective cover



The NC-4255PVC Protective cover can apply on NC-6255



## NC-6255Q NC-6255QH

**3/4" DRIVE AIR IMPACT WRENCH** Twin Hammer Type  
Air inlet : 1/4"

- Light weight 1.9kg
- The front housing & back head cover made by magnesium alloy
- Durability composite material

8 pieces in one carton



PATENT GREASE HOLE FOR EZ GREASE VERSION ONLY

EZ GREASE



Exhaust



## NC-6210 / 6210Q NC-6220

**3/4" DRIVE AIR IMPACT WRENCH**

Twin Hammer Type  
Air inlet : 1/4"

**76%**  
Lighter

NC-6220 is equipped with 6" extended anvil

8 pieces in one carton



Exhaust



## NC-6236 NC-6236Q

**3/4" DRIVE AIR IMPACT WRENCH**

Twin Hammer Type  
Air inlet : 1/4"

**33%**  
Lighter

- Ultimate power reach 1200 ft-lb under 5seconds.
- Does the toughest job efficiently with industrial level quality & durability.

8 pieces in one carton



Exhaust





## NC-6266 NC-6266-6

### 3/4" DRIVE AIR IMPACT WRENCH

Twin Hammer Type

Air inlet : 3/8"

NC-6266-6 is equipped with 6" extended anvil

6 pieces in one carton

- Torque output 1500ft-lb reached in 5 seconds.
- Light weight 2.95kg.
- The front housing and back head cover made by magnesium alloy.
- Durability composite material.
- Special alloy steel impact mechanism to keep longer life time.



**MIGHTY POWER  
MIGHTY LIGHT**



## NC-6217

### 3/4" DRIVE AIR IMPACT WRENCH

Twin Hammer Type

Air inlet : 3/8"

4 pieces in one carton

- Alloy steel forward/reverse switch
- torque output 1400ft-lb reached in 5 seconds
- Special Alloy Steel impact mechanism to keep longer life time.



## NC-6213

### 3/4" DRIVE AIR IMPACT WRENCH

Twin Hammer Type

Air inlet : 3/8"

5 pieces in one carton

- Composite material



|           | Square Drive | Bolt Capacity | Torque Range       | Max Torque |      | Free Speed | Avg. Air Consumption | Air Pressure | Overall Length  | Net Weight |      | Air Hose | Sound Pressure | Vibration Level  |
|-----------|--------------|---------------|--------------------|------------|------|------------|----------------------|--------------|-----------------|------------|------|----------|----------------|------------------|
|           | Inch         | Inch (mm)     | FT-LB (Nm)         | FT-LB      | Nm   | R.P.M      | CFM (L/min)          | PSI (bar)    | Inch (mm)       | LBS        | kg   | Inch     | dBA            | m/s <sup>2</sup> |
|           |              |               |                    |            |      |            |                      |              |                 |            |      |          |                |                  |
| NC-6217   | 3/4"         | 1-1/4"(30)    | 200-1300(271-1762) | 1400       | 1898 | 4800       | 5.4(153)             | 90(6.3)      | 8-15/32" (215)  | 11.0       | 5.00 | 1/2"     | 92.0           | 6.1              |
| NC-6213   | 3/4"         | 1-1/16"(27)   | 200-1000(271-1356) | 1200       | 1627 | 6000       | 6.9(195)             | 90(6.3)      | 9-7/16" (239)   | 8.5        | 3.88 | 1/2"     | 92.0           | 5.0              |
| NC-6210   | 3/4"         | 3/4"(19)      | 180-600(244-810)   | 700        | 1017 | 7500       | 4.5(127)             | 90(6.3)      | 6-45/64" (170)  | 5.6        | 2.55 | 3/8"     | 87.0           | 4.5              |
| NC-6210Q  | 3/4"         | 3/4"(19)      | 180-600(244-810)   | 700        | 1017 | 6500       | 4.5(127)             | 90(6.3)      | 6-45/64" (170)  | 5.6        | 2.55 | 3/8"     | 85.0           | 4.5              |
| NC-6220   | 3/4"         | 3/4"(19)      | 180-600(244-810)   | 750        | 1017 | 7500       | 4.5(127)             | 90(6.3)      | 12-23/32" (323) | 6.7        | 3.08 | 3/8"     | 85.0           | 4.5              |
| NC-6236   | 3/4"         | 1"(25)        | 200-900(271-1220)  | 1200       | 1627 | 7500       | 5.5(155)             | 90(6.3)      | 6-45/64" (171)  | 5.9        | 2.68 | 3/8"     | 87.0           | 4.5              |
| NC-6236Q  | 3/4"         | 1"(25)        | 200-900(271-1220)  | 1200       | 1627 | 7500       | 5.5(155)             | 90(6.3)      | 6-45/64" (171)  | 5.9        | 2.68 | 3/8"     | 83.0           | 4.5              |
| NC-6255Q  | 3/4"         | 1"(25)        | 200-1100(271-1491) | 1400       | 1890 | 8500       | 4.8(136)             | 90(6.3)      | 7-13/16" (198)  | 4.2        | 1.90 | 3/8"     | 85.0           | 4.7              |
| NC-6255QH | 3/4"         | 1"(25)        | 200-1100(271-1491) | 1400       | 1898 | 8500       | 4.8(136)             | 90(6.3)      | 7-13/16" (198)  | 4.2        | 1.90 | 3/8"     | 85.0           | 4.7              |
| NC-6266   | 3/4"         | 1-1/4"(30)    | 200-1300(271-1760) | 1500       | 2034 | 6000       | 5.9(169)             | 90(6.3)      | 8-1/16" (205)   | 6.5        | 2.95 | 1/2"     | 88.0           | 5.9              |
| NC-6266-6 | 3/4"         | 1-1/4"(30)    | 200-1300(271-1760) | 1500       | 2034 | 6000       | 5.9(169)             | 90(6.3)      | 14-1/16" (355)  | 7.9        | 3.60 | 1/2"     | 88.0           | 5.9              |

# AIR IMPACT WRENCH



## NC-6113 / 6123

**3/4" DRIVE AIR IMPACT WRENCH** Pin Clutch Type  
Air inlet : 1/4"

NC-6123 is equipped with 6" extended anvil

4 pieces in one carton

- Common applications include maintenance of buses, trucks, farm machinery and construction equipment



## NC-6215 / 6225

**3/4" DRIVE AIR IMPACT WRENCH**

New Twin Hammer Type  
Air inlet : 1/4"

4 pieces in one carton

### FEATURES

- Light weight 1.8kg
- Balanced weighted body that offers comfort feeling



NC-6225 is equipped with 6" extended anvil



## NC-6216 / 6226

**3/4" DRIVE AIR IMPACT WRENCH** New Twin Hammer Type  
Air inlet : 3/8"

NC-6226 is equipped with 6" extended anvil

4 pieces in one carton

- Composite material

**NC-6216PVC**  
Protective cover



## NC-6218

**3/4" DRIVE AIR IMPACT WRENCH**

Twin Hammer Type  
Air inlet : 1/2"

2 pieces in one carton



## NC-8212

**1" DRIVE AIR IMPACT WRENCH**

New Twin Hammer Type  
Air inlet : 3/8"

4 pieces in one carton



## NC-8217

**1" DRIVE AIR IMPACT WRENCH**

Twin Hammer Type  
Air inlet : 3/8"

4 pieces in one carton






## NC-8219

### 1" DRIVE AIR IMPACT WRENCH

New Twin Hammer Type  
Air inlet : 1/2"

2 pieces in one carton

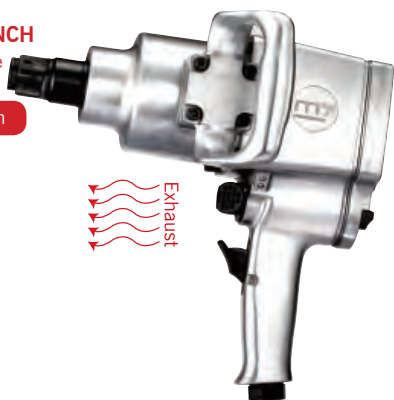

## NC-8237 / 8247

### 1" DRIVE AIR IMPACT WRENCH

Twin Hammer Type  
Air inlet : 3/8"

4 pieces in one carton



NC-8247 is equipped with 6" extended anvil



## NC-8266P / 8266P-6

### 1" DRIVE AIR IMPACT WRENCH

Twin Hammer Type  
Air inlet : 1/2"

4 pieces in one carton

**33%**  
Lighter

**38%**  
More Powerful



NC-8266-6 is equipped with 6" extended anvil



|            | Square Drive | Bolt Capacity | Torque Range       | Max Torque | Free Speed | Avg. Air Consumption | Air Pressure | Overall Length | Net Weight | Air Hose | Sound Pressure | Vibration Level  |
|------------|--------------|---------------|--------------------|------------|------------|----------------------|--------------|----------------|------------|----------|----------------|------------------|
|            | Inch         | Inch (mm)     | FT-LB (Nm)         | FT-LB Nm   | R.P.M      | CFM (L/min)          | PSI (bar)    | Inch (mm)      | LBS kg     | Inch     | dBA            | m/s <sup>2</sup> |
|            |              |               |                    |            |            |                      |              |                |            |          |                |                  |
| NC-6113    | 3/4"         | 1"(25)        | 150-600(203-814)   | 850 1153   | 4500       | 7.0(198)             | 90(6.3)      | 10" (252)      | 10.0 4.50  | 1/2"     | 94.3           | 7.2              |
| NC-6123    | 3/4"         | 1"(25)        | 150-600(203-814)   | 850 1163   | 4500       | 7.0(198)             | 90(6.3)      | 14-3/16" (350) | 11.6 5.30  | 1/2"     | 94.3           | 7.2              |
| NC-6225    | 3/4"         | 1"(25)        | 180-500(244-810)   | 900 1220   | 6500       | 7.0(198)             | 90(6.3)      | 13-3/4" (350)  | 10.8 4.90  | 1/2"     | 91.5           | 10.8             |
| NC-6215    | 3/4"         | 1"(25)        | 180-600(244-810)   | 900 1220   | 6500       | 7.0(198)             | 90(6.3)      | 9-7/32" (234)  | 10.0 4.50  | 1/2"     | 91.5           | 10.8             |
| NC-6216    | 3/4"         | 1-1/16"(27)   | 200-1000(271-1355) | 1200 1627  | 6000       | 6.0(169)             | 90(6.3)      | 9-1/4"(235)    | 9.0 4.10   | 1/2"     | 91.2           | 5.0              |
| NC-6218    | 3/4"         | 1-1/16"(27)   | 200-1400(271-1898) | 1500 2034  | 6000       | 6.3(182)             | 90(6.3)      | 12-9/16"(320)  | 12.5 5.70  | 1/2"     | 106.0          | 3.3              |
| NC-6226    | 3/4"         | 1-1/16"(27)   | 200-1000(271-1356) | 1200 1627  | 6000       | 6.0(170)             | 90(6.3)      | 13-3/4"(350)   | 9.9 4.50   | 3/8"     | 91.2           | 5.0              |
| NC-8212    | 1"           | 1-1/16"(27)   | 200-1000(271-1356) | 1300 1726  | 6000       | 6.0(170)             | 90(6.3)      | 9-1/4"(235)    | 9.6 4.40   | 1/2"     | 91.2           | 5.0              |
| NC-8217    | 1"           | 1-1/4"(30)    | 200-1300(271-1762) | 1500 2034  | 4800       | 5.4(153)             | 90(6.3)      | 8-3/4"(222)    | 11.0 5.00  | 1/2"     | 92.0           | 6.1              |
| NC-8219    | 1"           | 1-7/16"(36)   | 200-1600(271-2170) | 1800 2441  | 4000       | 11(311)              | 90(6.3)      | 12-13/32"(315) | 21.6 9.84  | 1/2"     | 103.4          | 16.7             |
| NC-8237    | 1"           | 1-3/8"(33)    | 200-1500(271-2034) | 1800 2441  | 4500       | 5.4(153)             | 90(6.3)      | 8-3/4"(222)    | 12.8 5.70  | 1/2"     | 92.0           | 6.1              |
| NC-8247    | 1"           | 1-3/8"(33)    | 200-1500(271-2034) | 1800 2441  | 4500       | 5.4(153)             | 90(6.3)      | 15-9/16"(395)  | 14.3 6.50  | 1/2"     | 92.0           | 6.1              |
| NC-8266P   | 1"           | 1-3/8"(35)    | 200-1800(270-2400) | 2300 3118  | 4500       | 5.4(153)             | 90(6.3)      | 10"(256)       | 13 5.90    | 1/2"     | 92.0           | 6.1              |
| NC-8266P-6 | 1"           | 1-3/8"(35)    | 200-1800(270-2400) | 2300 3118  | 4500       | 5.4(153)             | 90(6.3)      | 10"(256)       | 13.86 6.30 | 1/2"     | 92.0           | 6.1              |

# AIR IMPACT WRENCH



## NC-8343 NC-8343-8

**1" DRIVE AIR** Pin Less Type  
**IMPACT WRENCH** Air inlet : 1/2"  
NC-8343-8 is equipped with 8" extended anvil

- M7 UNIQUE SHARK SHAPE DESIGN ON BOTH SIDES
- NEW DESIGNED UP EXHAUST
- LOW VIBRATION OFFERS A SMOOTH OPERATION
- POWERFUL & DURABLE

1 piece in one carton



## NC-8211 NC-8221

**1" DRIVE AIR** Twin Hammer Type  
**IMPACT WRENCH** Air inlet : 1/2"  
NC-8221 is equipped with 6" extended anvil


1 piece in one carton



## NC-8232

**1" DRIVE AIR** New Twin Hammer Type  
**IMPACT WRENCH** Air inlet : 1/2"


1 piece in one carton

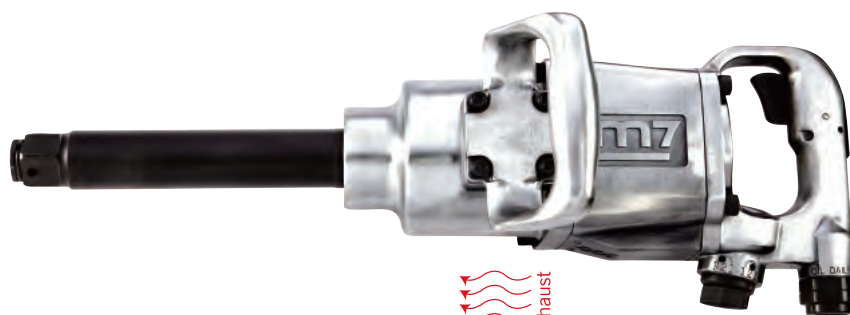

## NC-8311 NC-8351

**1" DRIVE AIR** Pin Less Type  
**IMPACT WRENCH** Air inlet : 1/2"  
NC-8351 is equipped with 6" extended anvil

2 pieces in one carton

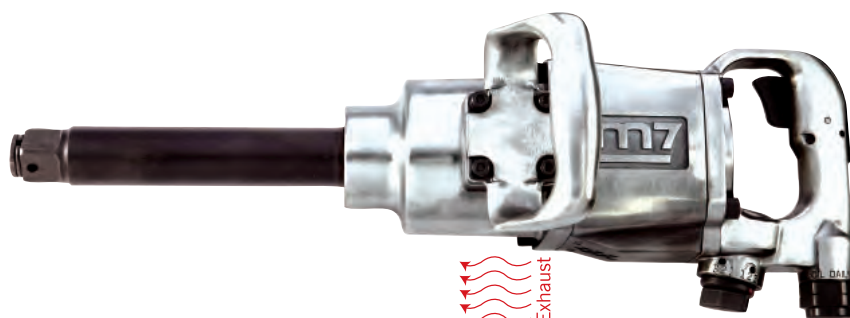





## NC-8216 NC-8226 NC-8226Q

**1" DRIVE AIR IMPACT WRENCH** Twin Hammer Type  
Air inlet : 1/2"

NC-8226 is equipped with 6" extended anvil

2 pieces in one carton

**48%**  
Lighter



NC-8226Q




## NC-8341

**1" DRIVE AIR IMPACT WRENCH** Pin Less Type  
Air inlet : 1/2"

NC-8341 is equipped with 6" extended anvil

1 piece in one carton

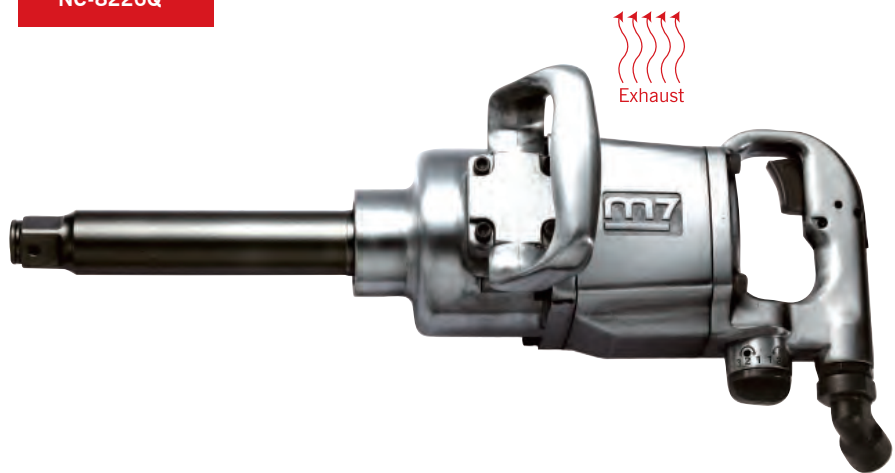

|           | Square Drive<br>Inch | Bolt Capacity<br>Inch (mm) | Torque Range<br>FT-LB (Nm) | Max Torque<br>FT-LB Nm | Free Speed<br>R.P.M | Avg. Air Consumption<br>CFM (L/min) | Air Pressure<br>PSI (bar) | Overall Length<br>Inch (mm) | Net Weight<br>LBS kg | Air Hose<br>Inch | Sound Pressure<br>dBA | Vibration Level<br>m/s <sup>2</sup> |
|-----------|----------------------|----------------------------|----------------------------|------------------------|---------------------|-------------------------------------|---------------------------|-----------------------------|----------------------|------------------|-----------------------|-------------------------------------|
|           |                      |                            |                            |                        |                     |                                     |                           |                             |                      |                  |                       |                                     |
| NC-8216   | 1"                   | 1-3/8"(33)                 | 200-1600(271-2170)         | 1800 2441              | 6000                | 9.0(254)                            | 90(6.3)                   | 13-1/2"(343)                | 15.5 7.00            | 1/2"             | 102.0                 | 9.3                                 |
| NC-8226   | 1"                   | 1-3/8"(33)                 | 200-1600(271-2170)         | 1800 2441              | 6000                | 9.0(254)                            | 90(6.3)                   | 19-3/16"(487)               | 18.4 8.40            | 1/2"             | 102.0                 | 9.3                                 |
| NC-8226Q  | 1"                   | 1-3/8"(33)                 | 200-1600(271-2170)         | 1800 2441              | 6000                | 9.0(254)                            | 90(6.3)                   | 19-3/16"(487)               | 18.4 8.40            | 1/2"             | 90                    | 9.3                                 |
| NC-8211   | 1"                   | 1-3/8"(33)                 | 200-1600(271-2170)         | 1800 2441              | 5000                | 10.0(284)                           | 90(6.3)                   | 14-8/15"(370)               | 22.2 10.10           | 1/2"             | 100.0                 | 10.0                                |
| NC-8221   | 1"                   | 1-3/8"(33)                 | 200-1600(271-2170)         | 1800 2441              | 5000                | 10.0(284)                           | 90(6.3)                   | 20-7/8"(530)                | 25.2 11.50           | 1/2"             | 100.0                 | 10.0                                |
| NC-8232   | 1"                   | 1-7/16"(36)                | 200-1600(271-2170)         | 1800 2441              | 4000                | 11.0(311)                           | 90(6.3)                   | 20-13/32"(518)              | 24.8 11.30           | 1/2"             | 102.0                 | 11.5                                |
| NC-8343   | 1"                   | 1-3/8"(33)                 | 200-1600(271-2170)         | 1800 2441              | 3900                | 11.5(325)                           | 90(6.3)                   | 15"(381)                    | 27.7 12.56           | 1/2"             | 103.0                 | 6.3                                 |
| NC-8343-8 | 1"                   | 1-3/8"(33)                 | 200-1600(271-2170)         | 1800 2441              | 3900                | 11.5(325)                           | 90(6.3)                   | 23"(590)                    | 30.6 13.9            | 1/2"             | 103.0                 | 6.3                                 |
| NC-8311   | 1"                   | 1-3/8" (33)                | 200-1600(271-2170)         | 1800 2441              | 4000                | 11.5(325)                           | 90(6.3)                   | 15" (380)                   | 24.0 10.90           | 1/2"             | 101.0                 | 7.3                                 |
| NC-8351   | 1"                   | 1-3/8" (33)                | 200-1600(271-2170)         | 1800 2441              | 4000                | 11.5(325)                           | 90(6.3)                   | 20" (510)                   | 27.6 12.50           | 1/2"             | 101.0                 | 7.3                                 |
| NC-8341   | 1"                   | 1-3/8" (33)                | 200-1600(271-2170)         | 1800 2441              | 4000                | 11.5(325)                           | 90(6.3)                   | 20" (510)                   | 27.6 12.50           | 1/2"             | 97.0                  | 6.3                                 |

# AIR IMPACT WRENCH



## NC-8382 NC-8382-8

**1" DRIVE AIR** Pin Less Type  
**IMPACT WRENCH** Air inlet : 1/2"  
NC-8382-8 is equipped with 8" extended anvil



**38%**  
more  
Powerful

**40%**  
Lighter

- Max. torque 2500 ft-lb (reverse in 5 seconds).
- Weight 30% less comparing with equal torque output models to reduce physical loading 30%.
- Torque output 38% higher comparing with equal weight models.
- Two-stage trigger for easier operation.

**NC-8382** 2 pieces in one carton

**NC-8382-8** 1 piece in one carton



## NC-8242 NC-8242-8

**1" DRIVE AIR** Twin Hammer Type  
**IMPACT WRENCH** Air inlet : 1/2"  
NC-8242-8 is equipped with 8" extended anvil

**NC-8242** 2 pieces in one carton

**NC-8242-8** 1 piece in one carton



## NC-8252 NC-8262

**1" DRIVE AIR** Twin Hammer Type  
**IMPACT WRENCH** Air inlet : 1/2"  
NC-8262 is equipped with 6" extended anvil

1 piece in one carton





## NC-8322 NC-8342

**1" DRIVE AIR** Pin Less Type  
**IMPACT WRENCH** Air inlet : 1/2"  
NC-8342 is equipped with 8" extended anvil

1 piece in one carton



## NC-8362 NC-8372

**1" DRIVE AIR** Pin Less Type  
**IMPACT WRENCH** Air inlet : 1/2"  
NC-8372 is equipped with 6" extended anvil

1 piece in one carton



## NC-9223 NC-9243

**1-1/2" DRIVE AIR** New Twin Hammer Type  
**IMPACT WRENCH** Air inlet : 1/2"  
NC-9243 is equipped with 8" extended anvil

1 piece in one carton



|           | Square Drive | Bolt Capacity | Torque Range       | Max Torque |      | Free Speed | Avg. Air Consumption | Air Pressure | Overall Length | Net Weight |       | Air Hose | Sound Pressure | Vibration Level  |
|-----------|--------------|---------------|--------------------|------------|------|------------|----------------------|--------------|----------------|------------|-------|----------|----------------|------------------|
|           | Inch         | Inch (mm)     | FT-LB (Nm)         | FT-LB      | Nm   | R.P.M      | CFM (L/min)          | PSI (bar)    | Inch (mm)      | LBS        | kg    | Inch     | dBA            | m/s <sup>2</sup> |
|           |              |               |                    |            |      |            |                      |              |                |            |       |          |                |                  |
| NC-8382   | 1"           | 1-9/16"(40)   | 200-2000(271-2710) | 2500       | 3390 | 5000       | 15.9(450)            | 90(6.3)      | 14-17/32"(370) | 22.0       | 11.00 | 1/2"     | 100.0          | 6.4              |
| NC-8382-8 | 1"           | 1-9/16"(40)   | 200-2000(271-2710) | 2500       | 3390 | 5000       | 15.9(450)            | 90(6.3)      | 22-15/32"(570) | 27.5       | 12.50 | 1/2"     | 100.0          | 6.4              |
| NC-8242   | 1"           | 1-9/16"(40)   | 200-2000(271-2710) | 2500       | 3390 | 5000       | 15.9(450)            | 90(6.3)      | 14-17/32"(370) | 23.1       | 10.50 | 1/2"     | 100.0          | 6.4              |
| NC-8242-8 | 1"           | 1-9/16"(40)   | 200-2000(271-2710) | 2500       | 3390 | 5000       | 15.9(450)            | 90(6.3)      | 22-15/32"(570) | 26.2       | 11.90 | 1/2"     | 100.0          | 6.4              |
| NC-8252   | 1"           | 1-7/16"(36)   | 200-2000(271-2170) | 2400       | 3250 | 4000       | 10.0(284)            | 90(6.3)      | 15-3/8"(390)   | 26.6       | 12.10 | 1/2"     | 100.0          | 10.0             |
| NC-8262   | 1"           | 1-7/16"(36)   | 200-2000(271-2170) | 2400       | 3250 | 4000       | 10.0(284)            | 90(6.3)      | 22"(560)       | 29.7       | 13.50 | 1/2"     | 100.0          | 10.0             |
| NC-8322   | 1"           | 1-7/16"(36)   | 200-2000(271-2170) | 2500       | 3390 | 3300       | 11.0(311)            | 90(6.3)      | 17-5/16"(440)  | 34.2       | 15.50 | 1/2"     | 93.9           | 8.8              |
| NC-8342   | 1"           | 1-7/16"(36)   | 200-2000(271-2170) | 2500       | 3390 | 3300       | 11.0(311)            | 90(6.3)      | 24-3/8"(619)   | 38.0       | 17.30 | 1/2"     | 93.9           | 8.8              |
| NC-8362   | 1"           | 1-7/16"(36)   | 200-2000(271-2170) | 2500       | 3390 | 3700       | 11.0(284)            | 90(6.3)      | 17-7/8"(455)   | 35.2       | 16.00 | 1/2"     | 93.9           | 8.8              |
| NC-8372   | 1"           | 1-7/16"(36)   | 200-2000(271-2170) | 2500       | 3390 | 3700       | 11.0(284)            | 90(6.3)      | 24-7/32"(615)  | 38.7       | 17.60 | 1/2"     | 93.9           | 8.8              |
| NC-9223   | 1-1/2"       | 2"(50)        | 200-3000(271-4065) | 3500       | 4746 | 3000       | 16.0(453)            | 90(6.3)      | 17-3/4"(450)   | 43.2       | 19.70 | 3/4"     | 104.5          | 8.8              |
| NC-9243   | 1-1/2"       | 2"(50)        | 200-3000(271-4065) | 3500       | 4746 | 3000       | 16.0(453)            | 90(6.3)      | 24-1/4"(616)   | 50.2       | 22.8  | 3/4"     | 104.5          | 8.8              |

# AIR IMPACT WRENCH

## NC-4232Q KIT

1/2" DRIVE AIR IMPACT WRENCH 11 PCS

### FEATURES

- 1pc - 1/2" Air Impact Wrench
- 7pcs - Impact sockets, MA411M13, 17, 19, 21, 22, 24, 27
- 1pc - 5" Extension bar
- 1pc - Mini Lubricator SW-12
- 1pc - 1/4" plug

5 pieces in one carton



## NC-4233Q KIT

1/2" DRIVE AIR IMPACT WRENCH 11 PCS

### FEATURES

5 pieces in one carton

- 1pc - 1/2" Air Impact Wrench
- 7pcs - Impact sockets, MA411M13, 17, 19, 21, 22, 24, 27
- 1pc - 5" Extension bar
- 1pc - Mini Lubricator SW-12
- 1pc - 1/4" plug



## NC-4255Q KIT

1/2" DRIVE AIR IMPACT WRENCH 11 PCS

### FEATURES

5 pieces in one carton

- 1pc - 1/2" Air Impact Wrench
- 7pcs - Impact sockets, MA411M13, 17, 19, 21, 22, 24, 27
- 1pc - 5" Extension bar
- 1pc - Mini Lubricator SW-12
- 1pc - 1/4" plug





# NC-4650 KIT

1/2"

DRIVE AIR  
IMPACT WRENCH 11 PCS

## FEATURES

5 pieces in one carton

- 1pc - 1/2" Air Impact Wrench
- 7pcs - Impact sockets,  
MA411M13, 17, 19, 21, 22, 24, 27
- 1pc - 5" Extension bar
- 1pc - Mini Lubricator SW-12
- 1pc - 1/4" plug



# NC-6236Q KIT

3/4" DRIVE AIR  
IMPACT WRENCH 11 PCS

## FEATURES

2 pieces in one carton

- 1pc - 3/4" Air Impact Wrench
- 7pcs - Impact sockets,  
MA611M24, 27, 30, 32, 33, 34, 36
- 1pc - 7" Extension bar
- 1pc - Mini Lubricator SW-12
- 1pc - 1/4" plug



# NC-6255Q KIT

3/4" DRIVE AIR  
IMPACT WRENCH 11 PCS

## FEATURES

2 pieces in one carton

- 1pc - 3/4" Air Impact Wrench
- 7pcs - Impact sockets,  
MA611M24, 27, 30, 32, 33, 34, 36
- 1pc - 7" Extension bar
- 1pc - Mini Lubricator SW-12
- 1pc - 1/4" plug



# AIR IMPACT WRENCH

## NC-0410KIT

**1/2" DRIVE AIR IMPACT WRENCH**

**10 PCS**

5 pieces in one carton

- 1pc - Air Impact Wrench
- 5pcs - Impact sockets, 6 points, standard length 11, 13 mm, deep version 17, 19, 21mm
- 1pc - Extension bar 3"
- 1pc - Mini Oiler 1/4" female x 1/4" male
- 1pc - 1/4" plug
- 1pc - Oil box



NC-0410M0  
NC-4212

NC-0410M2  
NC-4217

NC-0410M3  
NC-4258

## NC-0415KIT

**1/2" DRIVE AIR IMPACT WRENCH 15 PCS**

- 1pc-1/2" Air Impact Wrench
- 10pcs-Impact sockets, 6 points, standard length 9, 10, 11, 13, 14, 17, 19, 22, 24, 27mm
- 1pc-Extension bar 5"
- 1pc-Allen Key : 4mm
- 1pc-Mini Oiler 1/4" female x 1/4" male
- 1pc-1/4" plug

5 pieces in one carton



NC-0425M0  
NC-4212

NC-0425M2  
NC-4216

NC-0425M4  
NC-4230

NC-0415M4  
NC-4213

NC-0415M6  
NC-4217

NC-0415M9  
NC-4256



# NC-0615KIT

3/4" DRIVE AIR IMPACT WRENCH 15 PCS

- 1pc-3/4" Air Impact Wrench
- 8pcs-Impact sockets, 6 points, standard length 26, 27, 29, 30, 32, 35, 36, 38mm
- 1pc-Extension bar 7"
- 1pc-Universal Joint
- 2pcs-Allen Key : 4mm, 5mm
- 1pc-Mini Oiler 1/4"-6113,6215 , 3/8"-6216
- 1pc-1/4" plug - 6113.6215 , 3/8" plug - 6216
- 1pc-O-Ring&Pin

2 pieces in one carton



# NC-4255Q-41KIT NC-4255Q-41KITA05

2 pieces in one carton

## FEATURES

Expert Quality, Commonly used in car repair special sets .  
Supplied complete in a two tone 1/4 drawer EVA insert tray made from closed cell foam suitable to be used in M7 Expert tool chests and other manufacturers similar tool chests.  
Set with torque wrench for user correction.



Can be customized



NC-4255Q-41KITA05

